


S 25 T



Tweeter

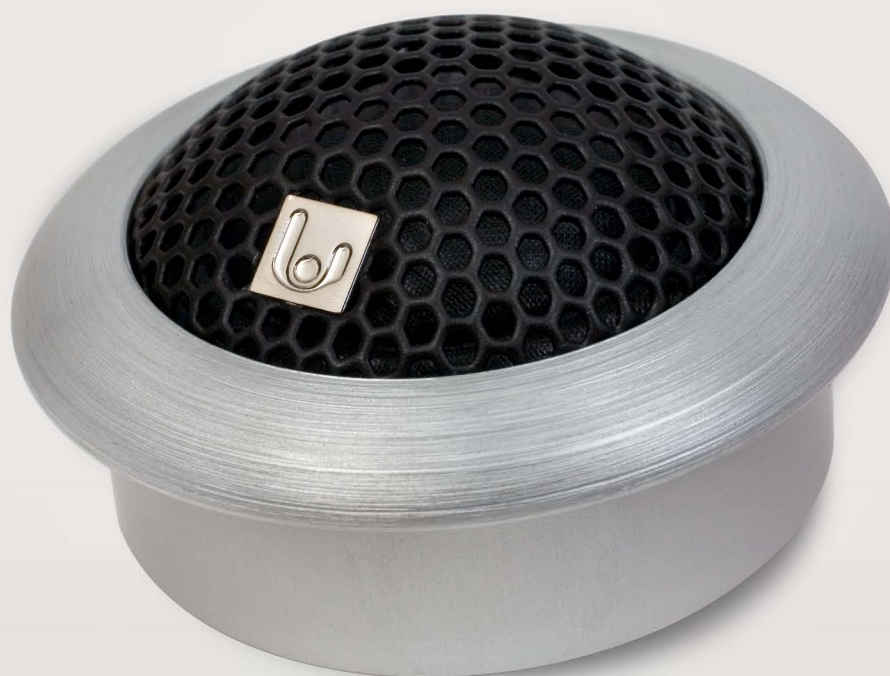

Nominal Impedance	4 Ohm
Power Rms	70 W
Nominal Voice Coil Diameter	25,5 mm
Sensitivity 1 w, 1 m	90 dB
Freq. Resp.	800-20.000 Hz
Fs	917 Hz

Magnet	Neodymium
Dome	Polyester
Surround	Polyester
Voice Coil Winding	Copper
Voice Coil Support	Aluminium
Frame	Aluminium

Speakers